




Тип	Частота резонанса	Резонансный импеданс (макс.)	Емкость при частоте 100 кГц	Входное напряжение (Vp-р макс.)	D	T
	кГц	Ом	нФ	В	мм	мм
FT-12T-11.0A1	11,0	1500	4,5	30	12	0,33
FT-12T-16.5A1	16,5	800	6	30	12	0,40
FT-12T-17.8A1	17,8	700	4,5	30	12	0,43
FT-15T-10.0A1	10,0	600	9	30	15	0,40
FT-15T-12.0A1	12,0	600	8	30	15	0,40
FT-20T-6.3A1	6,3	300	10	30	20	0,43
FT-20T-6.5A1	6,5	500	14	30	20	0,45
FT-20T-6.6A1	6,6	300	10	30	20	0,45
FT-20T-6.8A1	6,8	300	12	30	20	0,46
FT-20T-6.8A1	6,8	500	19	30	20	0,43
FT-22.5T-5.5A1	5,5	1000	12	30	22,5	0,43
FT-27G-4.0A1	4	500	25	30	27	0,45
FT-27G-4.6A1	4,6	300	20	30	27	0,5
FT-27G-4.6A1	4,6	500	25	30	27	0,45
FT-27T-3.0A1	3	300	35	30	27	0,38
FT-27T-3.6A1	3,6	500	25	30	27	0,45
FT-27T-3.8A1	3,8	1000	11	30	27	0,53
FT-27T-4.0A1	4	300	25	30	27	0,45
FT-27T-4.0A1	4	300	24	30	27	0,48
FT-27T-4.2A1	4,2	500	20	30	27	0,53
FT-27T-4.3A1	4,3	300	20	30	27	0,5
FT-27T-4.5A1	4,5	300	18	30	27	0,5
FT-27T-4.6A1	4,6	300	20	30	27	0,5
FT-32T-2.8A1	2,8	300	30	30	32	0,43
FT-32T-2.9A1	2,9	300	30	30	32	0,4
FT-35G-2.9A1	2,9	200	35	30	35	0,53
FT-35G-2.9A1	2,9	200	30	30	35	0,53
FT-35T-1.8A1	1,8	250	45	30	35	0,38
FT-35T-2.3A1	2,3	200	33	30	35	0,43
FT-35T-2.6A1	2,6	200	30	30	35	0,47
FT-35T-3.2A1	3,2	300	17	30	35	0,63
FTBD-11G-11.0A1	11,0	700	6	30	11	0,23
FTBD-11G-6.0A1	6,0	700	12	15	11	0,13
FTBD-11G-8.0A1	8,0	700	12	15	11	0,18
FTBD-11G-8.5A1	8,5	700	5,5	30	11	0,18
FTBD-12G-4.9A1	4,9	700	12	30	12	0,12
FTBD-12G-6.5A1	6,5	700	12	30	12	0,13
FTBD-12G-7.5A1	7,5	1000	6	30	12	0,18
FTBD-12T-4.9A1	4,9	1000	15	30	12	0,10
FTBD-12T-9.0A1	9,0	600	8	30	12	0,22
FTBD-12T-9.5A1	9,5	1300	8	30	12	0,22
FTBD-15G-6.0A1	6,0	1000	11	30	15	0,23
FTBD-15T-7.7A1	7,7	700	7	30	15	0,32
FTBD-18T-3.6A1	3,6	1000	12	30	18	0,23
FTBD-18T-4.0A1	4,0	1000	12	30	18	0,25
FTBD-20G-2.0A1	2,0	200	85	30	20	0,12
FTBD-20G-2.0A1	2,0	300	50	30	20	0,12
FTBD-20G-2.2A1	2,2	300	85	30	20,1	0,10
FTBD-20G-2.5A1	2,5	200	50	30	20	0,12
FTBD-20G-3.6A1	3,6	300	28	30	20	0,22
FTBD-20T-2.0A1	2,0	200	85	30	20	0,12
FTBD-20T-2.8A1	2,8	300	40	30	20	0,18
FTBD-20T-3.3A1	3,3	600	23	30	20	0,23
FTBD-20T-3.6A1	3,6	300	28	30	20	0,22
FTBD-20T-3.8A1	3,8	200	25	30	20	0,26
FTBD-20T-3.9A1	3,9	200	35	30	20	0,22
FTBD-20T-3.9A1	3,9	300	25	30	20	0,24
FTBD-20T-4.0A1	4,0	300	24	30	20	0,25
FTBD-20T-4.5A1	4,5	300	18	30	20	0,26
FTBD-21 G-3.0A1	3	300	25	30	z~l	u,z~a
FTBD-21T-3.3A1	3,3	300	25	30	21	0,23
FTBD-27G-2.3A1	2,3	300	45	30	27	0,23
FTBD-27T-1.8A1	1,8	1000	36	30	27	0,23
FTBD-27T-2.3A1	2,3	300	45	30	27	0,23
FTBD-27T-2.5A1	2,5	200	60	30	27	0,23
FTBD-27T-2.6A1	2,6	300	45	30	27	0,23
FTBD-31 G-1.4A1	1,4	1000	48	30	31	0,23
FTBD-31 G-1.6A1	1,6	300	50	30	31	0,23
FTBD-31 G-1.8A1	1,8	200	75	30	31	0,23
FTBD-31 T-1.6A1	1,6	300	50	30	31	0,23
FTBD-31 T-1.8A1	1,8	200	75	30	31	0,23
FTBD-31 T-2.0A1	2	150	130	30	31	0,23
FTBD-31T/G-1.3A1	1,3	800	56	30	31	0,23
FTBD-31T-1.5A1	1,5	200	70	30	31	0,22
FTBD-32G-1.6A1	1,6	200	65	30	32	0,23
FTBD-32G-2.5A1	2,5	200	65	30	32	0,23
FTBD-35G-1.6A1	1,6	300	80	30	34,7	0,23
FTBD-35T-1.3A1	1,3	200	75	30	35	0,23
FTBD-9T-15.0A1	15,0	1000	3,5	30	9	0,23
FTBD-9T-18.0A1	18,0	700	3,5	30	9	0,23

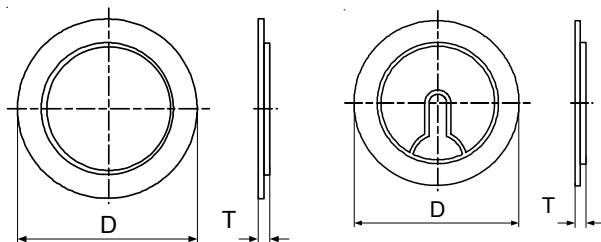

Тип	Частота резонанса	Резонансный импеданс (макс.)	Емкость при частоте 100 кГц	Входное напряжение (Vp-р макс.)	D	T
	кГц	Ом	нФ	В	мм	мм
FT-12T-11.0A1	11,0	1500	3,3	30	12	0,33
FT-20T-6.5B1	6,5	500	12	30	20	0,42
FT-27G-4.1B1	4,1	300	18	30	27	0,45
FT-27T-3.0B1	3,0	300	27	30	27	0,37
FT-27T-3.6B1	3,6	500	20	30	27	0,41
FT-27T-4.2B1	4,2	500	18	30	27	0,48
FT-27T-4.6B1	4,6	500	20	30	27	0,53
FT-32T-2.8B1	2,8	300	45	30	32	0,35
FT-35G-2.0B1	2,0	300	55	30	34,7	0,32
FT-35G-2.9B1	2,9	200	28	30	35	0,53
FT-35G-3.2A1	3,2	300	30	30	35	0,52
FT-35T-2.0B1	2,0	500	35	30	35	0,43
FT-35T-2.0B1	2,0	500	35	30	35	0,45
FT-35T-2.3B1	2,3	200	30	30	35	0,43
FT-35T-2.6B1	2,6	300	25	30	35	0,45
FT-35T-3.0B1	3,0	500	28	30	35	0,60
FT-35T-3.2A1	3,2	300	25	30	35	0,63
FT-35T-3.6A1	3,6	300	16	30	35	0,72
FT-38T-2.3A1	2,3	300	25	30	38	0,60
FT-41T-1.5A1	1,5	1000	55	30	41	0,44
FT-43T-3.4A1	3,4	300	30	30	43	0,45
FT-50T-1.0A1	1,0	500	50	30	50	0,43
FT-50T-3.0A1	3,0	400	40	30	50	0,43
FT-50T-3.9A1	3,9	300	17	30	50	0,63
FTBD-12G-4.5B1	4,5	1000	10	30	12	0,12
FTBD-12G-4.5B1	4,5	700	10	30	12	0,12
FTBD-12G-4.9B1	4,2...5,8	700	8...20	30	12	0,12
FTBD-12G-6.5B1	6,5	700	12	20	12	0,13
FTBD-12G-7.5B1	7,5	1000	6	30	12	0,18
FTBD-12T-7.5B1	7,5	1000	10	30	12	0,18
FTBD-12T-7.5B1	7,5	1000	6	30	12	0,18
FTBD-15G-3.5B1	3,5	1000	19	15	15	0,13
FTBD-15T-5.5B1	5,5	1500	12	30	15	0,23
FTBD-15T-6.0A1	6,0	700	12	30	15	0,23
FTBD-15T-6.6B1	6,6	500	15	30	15	0,22
FTBD-18T-3.5B1	3,5	1000	12	30	18	0,23
FTBD-18T-3.6B1	3,6	1000	11	30	18	0,23
FTBD-18T-3.8B1	3,8	1000	11	30	18	0,23
FTBD-20G-3.3B1	3,3	600	19	30	20	0,23
FTBD-20G-3.6B1	3,6	300	24	30	20	0,23
FTBD-20T-3.5B1	3,5	300	24	30	20	0,23
FTBD-20T-3.6B1	3,6	300	24	30	20	0,23
FTBD-20T-3.8B1	3,8	350	17	30	20	0,23
FTBD-20T-4.0B1	4,0	300	20	30	20	0,24
FTBD-20T-4.5B1	4,5	300	17	30	20	0,26
FTBD-21G-4.0B1	4,0	400	15	30	21	0,25
FTBD-27T-2.3B1	2,3	300	40	30	27	0,23
FTBD-27T-2.3B1	2,3	300	43	30	27	0,23
FTBD-27T-2.5B1	2,5	300	30	30	27	0,23
FTBD-27T-2.6B1	2,6	1200	36	30	27	0,33
FTBD-35T-1.3B1	1,3	300	75	30	35	0,23
FTBD-41G-0.7A1	0,7	1200	95	30	41	0,23
FTBD-41G-1.0A1	1,0	1000	75	30	41	0,23
FTBD-41G-2.5A1	2,5	400	75	30	41	0,23
FTBD-41T-2.5A1	2,5	400	75	30	41	0,23
FTBD-41T-0.7A1	0,7	1500	77	30	41	0,23
FTBD-41T-0.7A1	0,7	1500	75	30	41	0,23
FTBD-41T-1.0A1	1,0	1000	75	30	41	0,23
FTBD-43G-1.3A1	1,3	300	80	30	43	0,34
FTBD-43T-0.8A1	0,8	1000	75	30	43	0,23
FTBD-43T-1.3A1	1,3	300	80	30	43	0,34
FTBD-43T-2.0A1	2,0	300	80	30	43	0,22
FTBD-50T-1.8A1	1,8	300	75	30	50	0,23

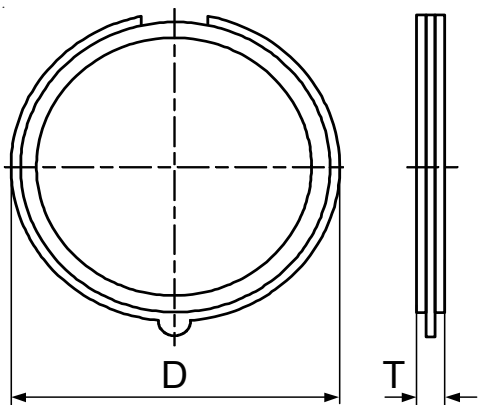

Тип	Частота резонанса	Резонансный импеданс (макс.)	Емкость при частоте 100	Входное напряжение (Vp-р макс.)	D	T
	кГц	Ом	нФ	В	мм	мм
FTBS-13TY-9.0A1	9,0	200	32	30	13X13	0,39
FTBS-14TY-9.0A1	9,0	200	35	30	14X14	0,45
FTBS-13TY-10.0A1	10,0	100	35	30	13X13	0,40
FTBS-20G-2.8A1	2,8	150	85	15	20	0,18
FTBS-21TY-3.8A1	3,8	150	80	30	21	0,28
FTBS-21TY-4.0A1	4,0	150	80	30	21	0,33
FTBS-21TY-5.5A1	5,5	300	70	30	21	0,50
FTBS-23T-3.8A1	3,8	150	80	30	23	0,33
FTBS-23TY-4.2A1	4,2	150	125	30	23	0,43
FTBS-24TY-3.3A1	3,3	150	110	30	24	0,33
FTBS-24TY-3.8A1	3,8	150	110	30	24	0,33
FTBS-27T-2.8A1	2,8	150	80	30	27	0,33
FTBS-27TY-2.8A1	2,8	150	130	30	27	0,33
FTBS-29T-2.8A1	2,8	100	130	30	29	0,33
FTBS-30TY-2.3A1	2,3	150	150	30	30X32	0,35
FTBS-31T-1.6A1	1,6	150	100	30	31	0,33
FTBS-31T-2.2A1	2,2	100	160	30	31	0,35
FTBS-31T-2.5A1	2,5	100	130	30	31	0,33
FTBS-31TY-2.5A1	2,5	150	150	30	30X30,4	0,33
FTBS-32TY-2.8A1	2,8	150	125	30	32	0,50
FTBS-33T-2.0A1	2,0	150	130	30	33	0,33
FTBS-35T-3.2A1	3,2	100	130	30	35	0,35
FTBS-37.6T-1.6A1	1,6	150	150	30	37,6	0,40
FTBS-37.6T-2.8A1	2,8	150	150	30	37,6	0,35
FTBS-37.6T-3.0A1	3,0	100	130	30	37,6	0,35
FTBS-37T-2.0A1	2,0	100	125	30	37	0,53
FTBS-37T-2.3A1	2,3	150	150	30	37	0,50
FTBS-40T-3.0A1	3,0	100	130	30	40	0,33
FTBS-41T-1.3A1	1,3	150	150	30	41	0,40

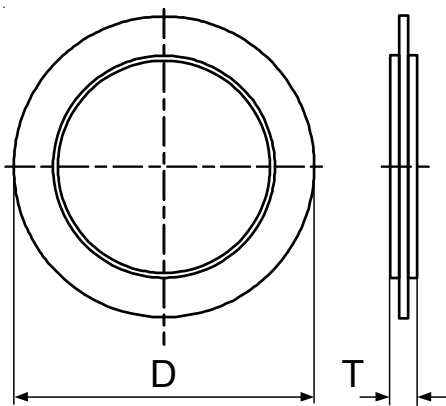

Тип	Частота резонанса	Резонансный импеданс (макс.)	Емкость при частоте 100	Входное напряжение (Vp-р макс.)	D	T
	кГц	Ом	нФ	В	мм	мм
BZ710	9,0	1500	7(при 1 кГц)	30	12,5X24	0,38
FT-32T-3.0C1	3,0	300	30	30	32	0,43
FT-35G-3.2B1	3,2	200	25	30	35	0,53
FT-35G-3.2C1	3,2	150	30	30	35	0,53
FT-35G-3.3A1	3,3	200	40	30	35	0,55
FT-35T-3.0B1	3,0	300	25	30	35	0,60
FTBD-14GF-4.0A1	4,0	600	14	30	14X14	0,23
FTBD-15T-4.8A1 с пружиной	4,8	1000	8	30	15	0,22
FTBD-20T-4.0A1 с пружиной	4,0	500	25	30	20	0,23
FTBD-21T-3.8C1	3,8	300	14	30	21	0,28
FTBD-41T-1.0B1	1,0	1000	70	30	41	0,23
FTBD-41T-2.6B1	2,6	300	70	30	41	0,23
FTBD-50T-0.8B1	0,8	200	160	30	50	0,23

Микрометр цифровой

Диапазон: 0...25 мм
Точность: 0,001 мм

Цена 2490 руб.

