


**NOTES:**

- めっき仕様：表参照  
PLATING:SEE TABLE
- 本製品の適応相手及び各種仕様書は次ページを御参照ください。  
REFER TO THE NEXT PAGE FOR APPLICABLE PRODUCTS AND VARIOUS SPECIFICATION DOCUMENT.
- 本製品は金めっき品である。  
錫めっき品は5013340000-SD/PSD/000を御参照下さい。  
THIS PRODUCT IS A GOLD PLATING.  
PLEASE REFER TO 5013340000-SD/PSD/000 FOR TIN PLATING.

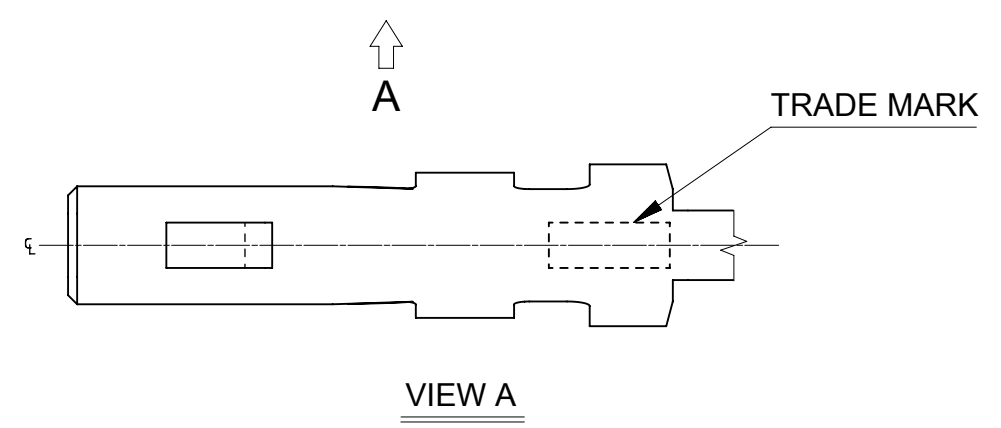

Φ0.4-0.8mm	AWG#28-32	リール REEL	連鎖状 CHAIN	501193 9000	0.76 μm MIN.
				501193 8000	0.38 μm MIN.
				501193 7000	0.1 μm MIN.
絶縁被覆外径範囲 INS. RANGE	適用電線範囲 WIRE RANGE	梱包形態 PACKAGING	端子形状 FORM	発注番号 ORDER No.	接点部 金めっき厚 GOLD PLATING THICKNESS OF CONTACT

部品 PART	材質 MATERIAL
ターミナル TERMINAL	りん青銅 PHOSPHOR BRONZE
接点部 CONTACT	金めっき：めっき厚は表参照のこと GOLD PLATING：SEE TABLE FOR PLATING THICKNESS
下地めっき UNDER PLATING	ニッケルめっき：1.0 μm MIN. NICKEL

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS mm	SCALE 20:1	CURRENT REV DESC: REDRAWN AND REVISED	<b>molex</b>		
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 621720			
ANGULAR TOL	± 3.0 °	DRWN: AISHIKAWA 2019/06/14	PRODUCT CUSTOMER DRAWING		
4 PLACES	± 0.2	CHK'D: AIDA 2019/08/20	DOCUMENT NUMBER		
3 PLACES	± 0.2	APPR: SAKIYAMA 2019/08/20	5011930000-SD		
2 PLACES	± 0.2	INITIAL REVISION:	DOC TYPE	DOC PART	REVISION
1 PLACE	± 0.2	DRWN: AISHIKAWA 2018/12/19	PSD	000	B
0 PLACES	± 0.2	APPR: SAKIYAMA 2019/01/28	SHEET NUMBER		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING A3-SIZE	SERIES 501193	MATERIAL NUMBER SEE TABLE	CUSTOMER

適応製品及び各種仕様書  
 APPLICABLE PRODUCTS AND VARIOUS SPECIFICATIONS

列 ROW	SINGLE											
適応ハウジング APPLY HOUSING	INNER LOCK						OUTER LOCK					
シリーズ番号 SERIES No.	501330						501939					
適応嵌合相手 MATE WITH	SMT						SMT					
	VERTICAL			RIGHT ANGLE			VERTICAL			RIGHT ANGLE		
	GOLD PLATING (THICKNESS)			GOLD PLATING (THICKNESS)			GOLD PLATING (THICKNESS)			GOLD PLATING (THICKNESS)		
	0.1μm MIN.	0.38μm MIN.	0.76μm MIN.	0.1μm MIN.	0.38μm MIN.	0.76μm MIN.	0.1μm MIN.	0.38μm MIN.	0.76μm MIN.	0.1μm MIN.	0.38μm MIN.	0.76μm MIN.
シリーズ番号 SERIES No.	504449	203556	203557	202396	203558	203559	501940	203560	203561	501953	203562	203563
製品仕様書 PRODUCT SPECIFICATION	5013300000-PS 002						5019390000-PS 001					
取扱説明書 APPLICATION SPECIFICATION	5013300000-AS 000											

列 ROW	DUAL					
適応ハウジング APPLY HOUSING	INNER LOCK					
シリーズ番号 SERIES No.	501189					
適応嵌合相手 MATE WITH	SMT					
	VERTICAL			RIGHT ANGLE		
	GOLD PLATING (THICKNESS)			GOLD PLATING (THICKNESS)		
	0.1μm MIN.	0.38μm MIN.	0.76μm MIN.	0.1μm MIN.	0.38μm MIN.	0.76μm MIN.
シリーズ番号 SERIES No.	501190	203564	203565	501571	203566	203567
製品仕様書 PRODUCT SPECIFICATION	5011890000-PS 001					
取扱説明書 APPLICATION SPECIFICATION	5011890000-AS 000					

製品嵌合図は各"適応嵌合相手"図面参照のこと  
 MATING VIEW : REFER TO EACH "MATE WITH" PART DRAWING

圧着端子 梱包仕様書 PACKING SPECIFICATION OF CRIMP TERMINAL	PART NUMBER	SPECIFICATION NUMBER
	501193 7000 / 8000 / 9000	SPK-501193-001

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
DIMENSION UNITS <b>mm</b>	SCALE <b>1:1</b>	CURRENT REV DESC: REDRAWN AND REVISED			<b>molex</b>					
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 621720								
ANGULAR TOL	± 3.0 °	DRWN: AISHIKAWA 2019/06/14			PICO-CLASP 1.0 W/B CRIMP TERMINAL GOLD PLATING					
4 PLACES	± 0.2	CHK'D: AIDA 2019/08/20			PRODUCT CUSTOMER DRAWING					
3 PLACES	± 0.2	APPR: SAKIYAMA 2019/08/20			DOCUMENT NUMBER					
2 PLACES	± 0.2	INITIAL REVISION:			5011930000-SD			DOC TYPE	DOC PART	REVISION
1 PLACE	± 0.2	DRWN: AISHIKAWA 2018/12/19			PSD			000	B	
0 PLACES	± 0.2	APPR: SAKIYAMA 2019/01/28			MATERIAL NUMBER			CUSTOMER		SHEET NUMBER
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	501193				2 OF 2	